

PROJECT ESTIMATE & QUANTITY SUMMARY

PROJECT DETAILS

- Project Name : Luxury Main Villa Construction
- Location : Chennai, Tamilnadu
- Estimation Type : BIM 3D Quantity Extraction & Detailed Master BOQ
- Building Type : Two-Story Residential Villa (G+1)

PROJECT HIGHLIGHTS

- Primary Tools Used : Autodesk Revit 3D, AutoCAD & MS Excel
- Scope of Work : Concrete, Brickwork / Masonry, Doors & Windows Schedule, Flooring & Tiling, Wall Finishes
- Takeoff Workflow : Revit 3D Model Extraction -> Excel Data Processing -> Master BOQ

QUANTITY & COST SUMMARY BREAKDOWN

Total Built-up Area: 3,500 Sq.ft (approx. 325 Sq.m)

Doors & Windows Cost: ₹ 36,53,950.00

Wall & Brickwork Cost: Included in Master Schedule

Estimated Grand Total: As per Master BOQ Sheet

Master BOQ Summary Table			
Item No	Description	Unit	Total Amount
1	Door Schedule	Nos	₹ 183,000.00
2	Windows Schedule	Nos/Sq.m	₹ 153,956.00
3	Floor Material Takeoff	Sq.m	₹ 3,653,950.00
4	Wall Material Takeoff	Sq.m/Cu.m	₹ 1,447,650.00
	SubTotal		₹ 5,438,556.00
	Contingencies	3%	₹ 163,156.68
	GRAND TOTAL		₹ 5,601,712.68



2

ELEVATION


1 : 500



3

Section

1 : 500

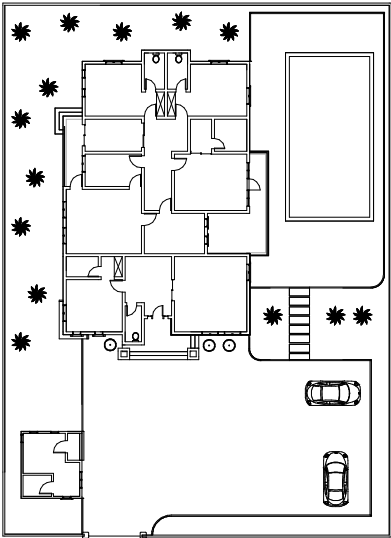

1

PLAN

1 : 500

Autodesk® Revit®

www.autodesk.com/revit

Owner

Project Name

Unnamed

Project number	Project Number	A103
Date	Issue Date	
Drawn by	Author	
Checked by	Checker	Scale 1 : 500

Door Schedule								
Type Mark	Family and Type	Width	Height	Count	Level	Material Rate	Labour Rate	Total Rate
56	Curtain Wall Sgl Glass: Curtain Wall Sgl Glass	850	2000	1	PLAN	₹ 12,000.00	₹ 1,500.00	₹ 82,500.00
30	M_Single-Flush: 0915 x 2032mm	900	2032	11	PLAN	₹ 6,500.00	₹ 1,000.00	₹ 30,000.00
33	M_Single-Flush: DOOR2	750	2100	5	PLAN	₹ 5,000.00	₹ 1,000.00	₹ 10,500.00
59	Single-Raised Panel with Sidelights: 30" x 80"	762	2032	1	PLAN	₹ 9,000.00	₹ 1,500.00	₹ 26,000.00
43	Sliding-2 panel: 72" x 84"	1570	2134	2	PLAN	₹ 12,000.00	₹ 1,000.00	₹ 12,000.00
48	Sliding-2 panel: 1570	1570	2134	1	PLAN	₹ 11,000.00	₹ 1,000.00	₹ 11,000.00
34	Sliding-Closet: 72" x 84"	1829	2134	1	PLAN	₹ 10,000.00	₹ 1,000.00	₹ 11,000.00
Grand total: 22				22			Total Amount	₹ 183,000.00

Window Schedule											
Type Mark	Family and Type	Width	Height	Sill Height	Count	Level	Area/Unit	Material Rate	Labour Rate	Total Rate	Total Amount
22	Awning with Trim: 36" x 48"	600	1500		10	PLAN	0.9	₹ 4,500.00	₹ 800.00	₹ 5,300.00	₹ 47,700.00
19	Casement Dbl with Trim: 48" x 48"	1219	1219	900	11	PLAN	1.485961	₹ 5,200.00	₹ 900.00	₹ 6,100.00	₹ 99,707.98
12	M_Fixed: 0610 x 0610mm	610	610	1500	4	PLAN	0.3721	₹ 3,800.00	₹ 600.00	₹ 4,400.00	₹ 6,548.96
Grand total: 25					25					Total Unit Rate	₹ 153,956.94

Floor Material Takeoff							
Family and Type	Material: Name	Material: Area	Level	Material Rate	Labour Rate	Total Rate	Total Amount
Floor: 750	Default Floor	1	PLAN	₹ 400.00	₹ 150.00	₹ 550.00	₹ 550.00
Floor: 750	Default Floor	1	2.CELLING	₹ 400.00	₹ 150.00	₹ 550.00	₹ 550.00
Floor: 750	Default Floor	1	PLAN	₹ 400.00	₹ 150.00	₹ 550.00	₹ 550.00
Floor: 750	Default Floor	1	2.CELLING	₹ 400.00	₹ 150.00	₹ 550.00	₹ 550.00
Floor: Generic 150mm	Flooring pool	22	0.NGL	₹ 650.00	₹ 150.00	₹ 800.00	₹ 17,600.00
Floor: Generic 150mm	Flooring pool	113	0.NGL	₹ 650.00	₹ 150.00	₹ 800.00	₹ 90,400.00
Floor: Generic 150mm	green	333	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 299,700.00
Floor: Generic 150mm	pool bountry	309	PLAN	₹ 400.00	₹ 150.00	₹ 550.00	₹ 169,950.00
Floor: Generic 150mm	pool bountry	1	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 900.00
Floor: Generic 150mm	pool bountry	1	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 900.00
Floor: Generic 150mm	pool bountry	2	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 1,800.00
Floor: Generic 150mm	pool bountry	2	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 1,800.00
Floor: Generic 150mm	pool bountry	943	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 848,700.00
Floor: Generic 150mm	pool bountry	333	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 299,700.00
Floor: Generic 150mm	pool bountry	11	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 9,900.00
Floor: Generic 150mm	pool bountry	113	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 101,700.00
Floor: Generic 150mm	pool bountry	7	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 6,300.00
Floor: Generic 150mm	sand floor	943	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 848,700.00
Floor: Generic 150mm	white	2	PLAN	₹ 400.00	₹ 150.00	₹ 550.00	₹ 1,100.00
Floor: 750	white	1	PLAN	₹ 400.00	₹ 150.00	₹ 550.00	₹ 550.00
Floor: 750	white	1	2.CELLING	₹ 400.00	₹ 150.00	₹ 550.00	₹ 550.00
Floor: 750	white	1	PLAN	₹ 400.00	₹ 150.00	₹ 550.00	₹ 550.00
Floor: 750	white	1	2.CELLING	₹ 400.00	₹ 150.00	₹ 550.00	₹ 550.00
Floor: Generic 150mm	white	943	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 848,700.00
Floor: Generic 150mm	white	113	0.NGL	₹ 650.00	₹ 250.00	₹ 900.00	₹ 101,700.00
Grand total: 25		4202				Total Unit Rate	₹ 3,653,950.00

Wall Material Takeoff							
Family and Type	Material: Name	Material: Area	Material: Volume	Material Rate	Labour Rate	Total Rate	Total Amount
	BRICK WALL	23	1.64 m ³	₹ 750.00	₹ 350.00	₹ 1,100.00	₹ 25,300.00
	Default Wall	1069	208.07 m ³	₹ 600.00	₹ 250.00	₹ 850.00	₹ 908,650.00
Wall: Generic - 200	Door - Frame	30	0.00 m ³	₹ 400.00	₹ 150.00	₹ 550.00	₹ 16,500.00
Basic Wall: 150	pool wall	88	0.00 m ³	₹ 650.00	₹ 250.00	₹ 900.00	₹ 79,200.00
	white	836	0.00 m ³	₹ 350.00	₹ 150.00	₹ 500.00	₹ 418,000.00
Grand total: 142		2045	209.70 m ³			Total Unit Rate	₹ 1,447,650.00