

BILL OF QUANTITIES (BOQ)

Master Executive Summary & Material Estimation Report

Project Ref: REVIT-BOQ-2026
Prepared By: Quantity Surveyor

TOTAL BASE COST	SUNDRIES (3%)	GRAND TOTAL	PRIMARY MODE
₹24,76,576.50	₹74,297.30	₹25,50,873.80	Revit Export

1. SCHEDULE COST SUMMARY

Item	Work Description	Total Takeoff Quantity	Estimated Cost (₹)
1.0	Door Material Takeoff	698 SF / 24 NOS	₹1,95,880.00
2.0	Floor Material Takeoff	4,953.24 CF / 1,790 SF	₹1,08,68,48.00
3.0	Wall Material Takeoff	5,114.24 CF / 4,891 SF	₹8,96,278.50
4.0	Window Material Takeoff	1,837 SF / 69 NOS	₹2,97,570.00
SUB TOTAL (Base Work Cost)			₹24,76,576.50
CONTINGENCIES & SUNDRIES (3%)			₹74,297.30
FINAL GRAND TOTAL PROJECT COST			₹25,50,873.80

2. QUANTITY SURVEYING METHODOLOGY


Measurement & Rate Analysis Guidelines:

- Volumetric (CF) Calculation:** Applied to structural elements including Concrete Cast-In-Place Slabs (150mm thickness) and Concrete Block Masonry Walls where material bulk depends directly on element thickness. Formatted as Volume (CF) × Total Rate per CF.
- Area (SF) Calculation:** Applied to surface finish materials (Floor Tiles, Wall Paint/Render, Cladding Stones, and Window Glazing/Frames) where thickness is negligible. Formatted as Area (SF) × Total Rate per SF.
- Revit Sheet Optimization:** Floor plan views updated to 1:100 scale with tightened Crop Region boxes for optimal drawing sheet presentation.


Prepared By:
Quantity Surveyor / Estimator
Approved By:
Project Lead / Site Engineer



2 Elevation
1 : 230

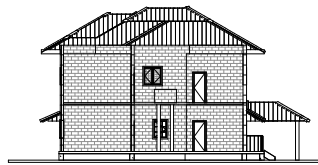

3 Section 1
1 : 230

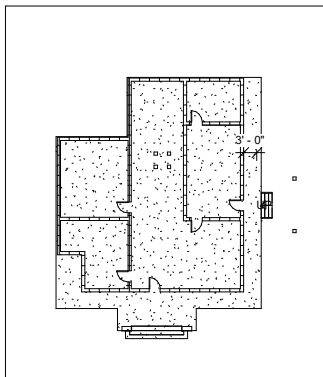

1 Plan
1 : 230

Autodesk® Revit®

www.autodesk.com/revit

Owner

Project Name

No.	Description	Date

Unnamed

Project number	Project Number	A101
Date	Issue Date	
Drawn by	Author	
Checked by	Checker	
Scale 1 : 230		

Door Material Takeoff									
Family and Type	Level	Material: Name	Material: Area	Material: Volume	Count	Material: Cost	Labour:Cost	Total:Cost	Totam:Amount
1.First_lvl									
M_Single-Flush: 0762 x 2032mm	1.First_lvl	Door - Frame	130	4.01 CF	6	₹ 150.00	₹ 50.00	₹ 200.00	₹ 26,000.00
M_Single-Flush: 0762 x 2032mm	1.First_lvl	Door - Panel	218	16.73 CF	6	₹ 250.00	₹ 80.00	₹ 330.00	₹ 71,940.00
2.Second_lvl									₹ -
M_Single-Flush: 0762 x 2032mm	2.Second_lvl	Door - Frame	130	4.01 CF	6	₹ 150.00	₹ 50.00	₹ 200.00	₹ 26,000.00
M_Single-Flush: 0762 x 2032mm	2.Second_lvl	Door - Panel	218	16.73 CF	6	₹ 250.00	₹ 80.00	₹ 330.00	₹ 71,940.00
Grand total: 24			698	41.48 CF	24			Total:Unit	₹ 195,880.00

Window Material Takeoff									
Family and Type	Level	Material: Name	Material: Area	Material: Volume	Count	Material: Cost	Labour:Cost	Total:Cost	Total:Amount
asegment 3x3 with Trim: 36" x 4	1.First_lvl	Metal - Chrome	203	3.90 CF	11	₹ 150.00	₹ 50.00	₹ 200.00	₹ 40,600.00
asegment 3x3 with Trim: 36" x 4	1.First_lvl	Sash	408	14.45 CF	11	₹ 120.00	₹ 40.00	₹ 160.00	₹ 65,280.00
asegment 3x3 with Trim: 36" x 4	1.First_lvl	Trim	205	4.57 CF	11	₹ 80.00	₹ 30.00	₹ 110.00	₹ 22,550.00
asegment Dbl with Trim: 32" x 4	2.Second_lvl	ing - Curtain Wall Gl	28	0.55 CF	2	₹ 250.00	₹ 50.00	₹ 300.00	₹ 8,400.00
asegment Dbl with Trim: 48" x 4	2.Second_lvl	Masonry - Glass Bloc	236	4.73 CF	10	₹ 180.00	₹ 40.00	₹ 220.00	₹ 51,920.00
	2.Second_lvl	Sash	511	19.09 CF	12	₹ 120.00	₹ 40.00	₹ 160.00	₹ 81,760.00
	2.Second_lvl	Trim	246	5.49 CF	12	₹ 80.00	₹ 30.00	₹ 110.00	₹ 27,060.00
Grand total: 69			1837	52.77 CF	69			Total:Unit	₹ 297,570.00

Wall Material Takeoff								
Family and Type	Base Constraint	Material: Name	Material: Area	Material: Volume	Material: Cost	Labour: Cos	Total: Cost	Total: Amount
Foundation - 300mm	0.Ground_lvl	Concrete - Cast In Sit	523	515.14	₹ 140.00	₹ 35.00	₹ 175.00	₹ 90,149.50
Wall: Generic - 225mm N	1.First_lvl	lightsandal	4041	0	₹ 15.00	₹ 10.00	₹ 25.00	₹ 101,025.00
Wall: Generic - 225mm N	2.Second_lvl	lightsandal	534	0	₹ 15.00	₹ 10.00	₹ 25.00	₹ 13,350.00
Wall: Generic - 225mm N	1.First_lvl	sonry - Concrete Blc	4709	3476.37	₹ 110.00	₹ 30.00	₹ 140.00	₹ 486,691.80
	2.Second_lvl	sonry - Concrete Blc	1542	1122.73	₹ 110.00	₹ 30.00	₹ 140.00	₹ 157,182.20
Foundation - 300mm	0.Ground_lvl	Masonry - Stone	308	0	₹ 120.00	₹ 30.00	₹ 150.00	₹ 46,200.00
Foundation - 300mm	0.Ground_lvl	ender - Beige, Smoo	4	0	₹ 90.00	₹ 30.00	₹ 120.00	₹ 480.00
Foundation - 300mm	0.Ground_lvl	Stone (2)	8	0	₹ 120.00	₹ 30.00	₹ 150.00	₹ 1,200.00
Grand total: 67			11669	5114.24			Total:Unit	₹ 896,278.50

Floor Material Takeoff								
Family and Type	Level	Material: Name	Material: Area	Material: Volume	Material: Cost	Labour:Cos	Total:Cost	Total:Amount
0.Ground_lvl								
Floor: Generic 150mm	0.Ground_lvl	Default Floor	6048	2976.38	₹ 140.00	₹ 35.00	₹ 175.00	₹ 520,866.50
1.First_lvl							₹ -	
Floor: Generic 150mm	1.First_lvl	Default Floor		1143.11	₹ 140.00	₹ 35.00	₹ 175.00	₹ 200,044.25
Floor: Generic 150mm	1.First_lvl	Masonry - Stone	94	0	₹ 140.00	₹ 35.00	₹ 175.00	₹ 16,450.00
Floor: Generic 150mm	1.First_lvl	Render - Beige, Smooth		0	₹ 90.00	₹ 30.00	₹ 120.00	₹ -
Floor: Generic 150mm	1.First_lvl	Stone (2)	2	0	₹ 120.00	₹ 30.00	₹ 150.00	₹ 300.00
2.Second_lvl							₹ -	₹ -
Floor: Generic 150mm	2.Second_lvl	Default Floor	1694	833.76	₹ 140.00	₹ 35.00	₹ 175.00	₹ 145,908.00
Floor: Generic 150mm	2.Second_lvl	Render - Beige, Smooth	1694	0	₹ 90.00	₹ 30.00	₹ 120.00	₹ 203,280.00
Grand total: 14				4953.24			Total:Unit	₹ 1,086,848.75

Total Summary			
Item No	Description	Total Quantity	Estimation: Cost
1	Door Material	698SF/24NOS	₹ 195,880.00
2	Floor Material	4953.24CF/1790 SF	₹ 1,086,848.00
3	Wall Material	5114.24CF/4891SF	₹ 896,278.50
4	Window Material	1837SF/69NOS	₹ 297,570.00
		Sub:Total	₹ 2,476,576.50
		Contingencies(3%)	₹ 74,297.30
		Grand:Total	₹ 2,550,873.80